



ANVIZ®

2022

Access Control & Time and Attendance Solutions

Contents

About Anviz

Leading Security Solution Provider for Commercial Market

Face Recognition

AI Based Smart Face Recognition Terminals

Outdoor Access

Outdoor Biometric & RFID Access Control

CrossChex

Access Control & Cloud-based Time and Attendance Software

Mobile Access

Secure & Convenient Touchless Access Control

Time and Attendance

Biometric-based Time Attendance Management



07/22/2020 Sunday

14:49:11



About Anviz

Providing smart solutions based on cloud and IoT technologies to SMB and enterprises clients globally.

20 Years +
Experiences

100+
Countries

200,000+
Projects

200+
Intellectual Property

BioNANO
Core Algorithm

RVI™
Video Intelligence Analysis

Cloud
Anviz Open Cloud Platform

ACP™
Anviz Secure Control Protocol



China Office

Global R&D Center & Operation Center





Access Control & Time and Attendance Solutions



Intelligent Surveillance Products and Solutions

USA Office

Sales & Operation &
Customer Service Center



Manufacturing Base

50,000 Square Meters
2,000,000 Units Capacity Annually

2019

Secu365 business unit established



2017

Successful on commercial market



2015

U-TEC business unit established



2011

AGPP global partnership program launched




2005

Anviz Global established



Anviz Milestones



2020

AI facial recognition



2018

Open new production base



2016

Smart lock product line landed on north america market



2013

Start full HD product line



2007

Launched first generation access control and time attendance product

Technical Partner



NUVO



ASSA ABLOY



SONY

IntelliVision
Video Intelligence and Automated Monitoring

tyco

Anviz Core Technologies

Anviz values innovation, we invest most of our funds in the R&D department to stay at the top of the biometric access control, time and attendance, and surveillance industry. Anviz recruits professional developers around the world, and technical teams located in global offices to support our clients timely.

BioNANO® Patent Biometrics Algorithm



Fingerprint Algorithm

- Auto Adjust for Wet and Dry Finger
- FFD (World Best Fake Finger Detection)
- Securer Fingerprint Template Encryption
- Heal Broken Fingerprint Line



Face Algorithm

- Liveness Face Detection
- Global Face Detection Adoption
- Masked Face Detection
- Fast Forehead Positioning and Temperature Detection



Iris Algorithm

- Most Securer Comparison Way
- 1:1,000,000 Lowest False Rate
- Adopt for Complex Environment
- Two Eyes Accurate Identification



Patent Surveillance Realtime Video

Smart Imaging

- True WDR Technologies
- Startlight Imaging Priority
- Smart IR Technology
- Image Distortion Correction

AI Algorithms

- Person Detection
- Vehicles Detection
- Intruder Detection
- Crossline Detection

ance Algorithm o Intelligence



Data Privacy & Security

Smart Stream and Storage

- Auto Optimize Stream in Damic Area
- Auto Optimize Stream for ROI Area
- Three streams for Smart Usage
- Multiple Storage Options

Data Security

- End to End Data Encryption
- AWS Global Cloud Platform
- Login Verification
- AES256 & HTTPS Protection

Biometric Template Encryption

We use our own algorithm to encrypt the data into codes and we never restore any raw fingerprint, face or Iris image.

Personal Information on Card

We provide biometric information on card technologies, to restore the fingerprint, face templates on Mifare card and not restored in device, so ensure the privacy to use these biometrics information.

Personal Information on Mobile

We provide biometric information on mobile technologies, to restore the fingerprint, face templates on mobile phone and not restored in device, so ensure the privacy to use these biometrics information.

End to End Data Protection

All the data communication among edge device, local server, cloud server and APP are projected and encrypted by AES256 and HTTPS protocol to ensure the overall protection to follow the GDPR regulations.

Why Anviz?

Global Sales

4

Global Offices

300+

Employees

100+

Distributors

30+

Technical Partners

2000+

Resellers

50+

System Integrators

Canada

USA

South
America

Project Registration Program

Anviz rewards you for specifying Anviz products in project bidding. We give our integrator partners the opportunity to strengthen their position on projects with special pricing and the full and active support of the Anviz team.

Europe

Shanghai

South
East Asia

Africa

Success Stories



Mexico Government Liveness
Fingerprint Access Control Project

100,000 staffs

1,000 sites



Top 20 Universities Cloud-based
Time & Attendance Project

150,000 students

and faculties



Total Security Solution for Global
offices of A Corporate

50,000 staffs across more than

30 global branches

Global Events



Global Expo



Road Show



Training Webinar




CrossChex

CrossChex Standard

Desktop Access Control & Time Attendance Software

CrossChex is a professional access control and time & attendance management solutions. With it's unique features and flexible and multiple system deployment structures, customer oriented concepts to satisfy SMB and enterprises clients for their time management, access control management requirements and help them improve the overall efficiency on HR and security management.

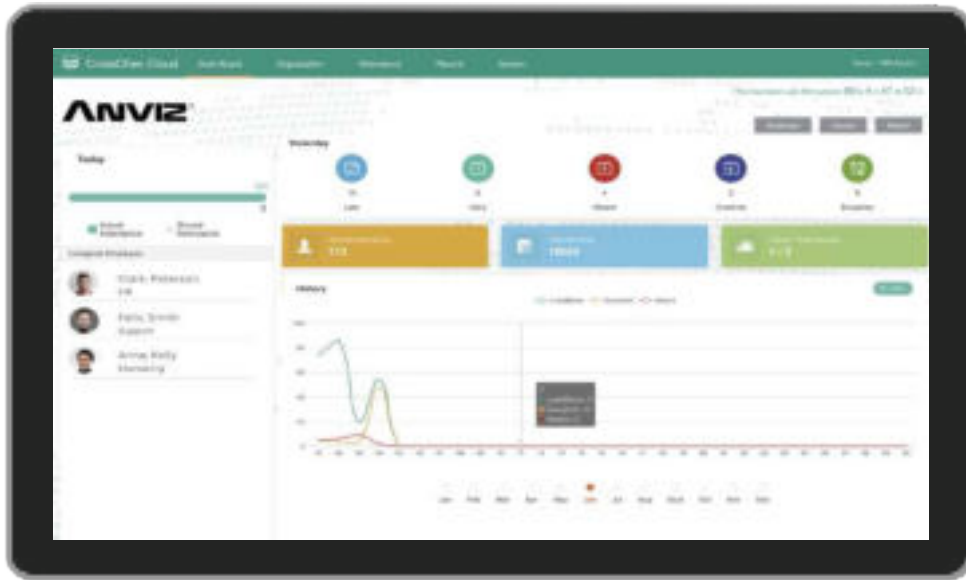

- Manage your time and attendance on cloud without any software.
- Access data anywhere, anytime, from any computer.
- Track employees from any location to see where employees clocked in and out.
- View reports of employees' attendance and health.
- Shift work times whenever you want.



High-Impact Reporting

Easily track and export employee hours in seconds which makes you feel intuitive with daily processes.



Powerful Dashboard

The handy dashboard lets you easy to track employee attendance by real-time analytics.



Best-in-Class Scheduling

Easily set up attendance rules, create and manage employee schedules for all your organization.



Super Easy Employees and Devices Management

Easy and quick to set up devices and add, delete, or modify employees' information.

CrossChex Cloud

Cloud-based Time & Attendance Management Solution

CrossChex Cloud is a super quick setup and easy to use system dedicated to saving your business money through employee time management works for any business.



Scheduling



Dashboard



Reporting



Management



Mobile





CrossChex





CrossChex Mobile

More Convenient More Secure

CrossChex Mobile is the mobile version of CrossChex Software, which lets you add and manage everyone and grant access rights to them on a smartphone. Your staff can easily clock in and access to any places with just one click on the phone. Any of Anviz access control devices with Bluetooth function can be added to CrossChex Mobile, and the time attendance device with Bluetooth function can be also added to CrossChex Mobile to have a clock in function and realize the access control function with linked to a Bluetooth micro access controller. CrossChex Mobile is suitable for the application in small offices, retail stores, gyms, clinics, etc.



For Users

- Use your phone to unlock doors.
- Employees can check in and out from the phone.
- No more lost, misplaced or shared cards.
- Check attendance record from your phone.



For Admins

- Use your phone to add and delete users/ fingers/ cards.
- Grant or revoke access to anyone with one click.
- Save cost of issuing cards and maintenance in comparison to physical cards.

Face Recognition

Today's dynamic business environment requires real-time time management and access control solution with anytime, anywhere access. Anviz's FaceDeep Series, a fully integrated contactless and thermal management face recognition solution for the people to access control of entrances or record attendance time and simultaneously check temperature and mask-wearing without having to touch a terminal or gate, requirements which are quickly finding their way into commercial offices, hospitality and retail chains, hopeful crowded sports arenas, medical facilities, and more.

AI

AI Deep
Learning Engine



Various
Conditions



3D Live Face
Detection



Support
Cloud




Temperature
Screening

Mounts




Auto Swing Door

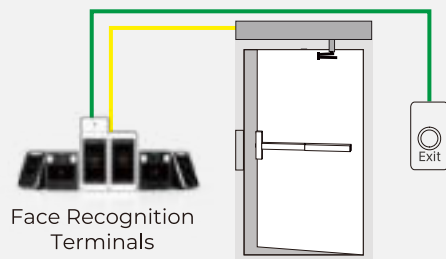

Wi-Fi

Auto Sliding Door

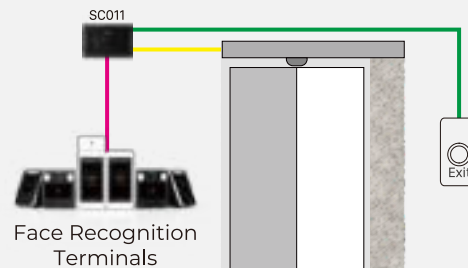

LAN

Time Clocking Point



4G



CrossChex Cloud
Cloud-based Management



CrossChex Standard
Desktop Management

Router

Exit Button Anviz Wiegand Relay





FaceDeep 3 &
FaceDeep 3 IRT



FacePass 7 Pro &
FacePass 7 Pro IRT



FaceDeep 5 &
FaceDeep 5 IRT



FaceDeep 3 QR &
FaceDeep 3 IRT QR

Specification Comparison

Product		 	 	
Product Name		W3	FacePass 7 Pro	FaceDeep 5
Hardware Function	Face Templates Capacity	200	3,000	20,000(Standard), 50,000(Customized)
	Log Capacity	50K	100K	100K
	LCD	2.8" TFT	3.5" TFT Touchscreen	5.0 TFT Touchscreen
	Verify Speed (1:3000)	<1.0s	<0.3s	<0.2s
	Live / Fake Detection	✓	✓	✓
	Mask Detection	✓	✓	✓
	Identify Distance	0.3~1.0m (0.39~0.79")	0.3~1.3m (11.81~51.18")	0.3~2.0m (11.81~19.69")
	Temperature Detection	-	FacePass 7 Pro IRT: Body Temperature Detection	FaceDeep 5 IRT: Body Temperature Detection
	Body Temperature Detection Distance	-	30~50cm (11.81~0.79")	30~50cm (11.81~0.79")
	RFID Options	125kHz EM	FacePass 7 Pro: 125kHz EM FacePass 7 Pro IRT: 125kHz EM FacePass 7 Pro-MIF: 13.56MHz MIFARE FacePass 7 Pro IRT-MIF: 13.56MHz MIFARE	125kHz EM & 13.56MHz MIFARE
	QR Code Scanning Distance	-	-	-
	Batch Enrollment	-	✓	✓
Communication	TCP/IP	✓	✓	✓
	Wi-Fi	Optional	✓	✓
	RS485	-	✓	-
	Bluetooth	-	-	-
	USB Host	-	✓	✓
Access Control Interface	Internal Relay (Door Control)	✓	✓	✓
	Exit Button	✓	✓	✓
	Door Contact	✓	✓	✓
	Wiegand Output	-	✓	✓
	Wiegand Input	✓	✓	✓
	Tamper Switch	✓	✓	✓
	Environments	Indoor	Indoor	IP65 / Outdoor
Software		CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud

			
FaceDeep 3	FaceDeep 3 Pro	FaceDeep 3 4G	FaceDeep 3 QR
6,000	6,000(Standard), 10,000(Customized)	6,000(Standard), 10,000(Customized)	6,000
100K	100K	100K	100K
5.0 TFT Touchscreen	5.0 TFT Touchscreen	5.0 TFT Touchscreen	5.0 TFT Touchscreen
<0.3s	<0.3s	<0.3s	<0.3s
✓	✓	✓	✓
✓	✓	✓	✓
0.3~1.5m (11.81~59.06")	0.3~1.5m (11.81~59.06")	0.3~1.5m (11.81~59.06")	0.3~1.5m (11.81~59.06")
FaceDeep 3 IRT: Body Temperature Detection	FaceDeep 3 Pro IRT: Body Temperature Detection	FaceDeep 3 4G IRT: Body Temperature Detection	FaceDeep 3 IRT QR: Body Temperature Detection
1~2cm (0.39~0.79")	1~2cm (0.39~0.79")	1~2cm (0.39~0.79")	1~2cm (0.39~0.79")
125kHz EM	13.56MHz MIFARE	13.56MHz MIFARE	-
-	-	-	3~10cm (1.18~3.94")
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓
-	✓	✓	-
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓
-	✓	✓	-
✓	✓	✓	✓
Indoor	Indoor	Indoor	Indoor
CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud

*Power Input: DC12V

Access Control

Outdoor Access

M Series standalone access control devices is suitable for various outdoor environment, with its professional IP65 and IK10 design. M series is integrated with fingerprint and keypad touchable and RFID card, NFC and optional Bluetooth touchless identification ways. M series can be applied into direct and distributed door controlling, wiegand output to third party controller, and also can be integrated with turnstiles, outdoor consumer terminals, etc.



Metal Housing IK10 Vandal-proof Structure

Come with robust, vandal-resistant metal housing and sophisticated engineering, it's able to withstand a high level of impact, making it vandal-resistant.



IP65 Dust & Water Proof

Anviz M Series is a perfect solution for outdoor applications coupled with IP65 ingress protection.






Versatile Access Control Interfaces

M Series comes with full TCP/IP, RS-485 and Wiegand interfaces to provide higher flexibility and multiple installation options for different environments. It offers an exit button and door sensor inputs and 1 relay output to control peripheral devices



Mobile Access

Easily access any place with just one click on the phone.

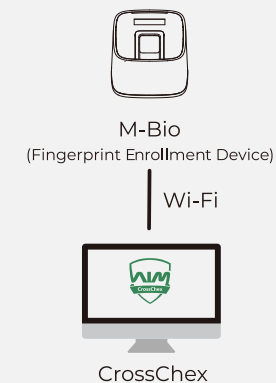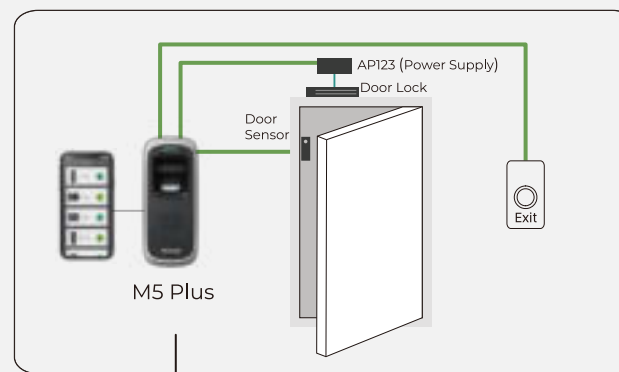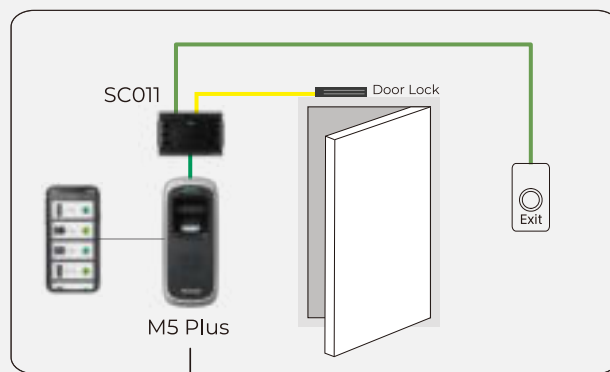

— Output — Input — Relay



M3 Pro



M5 Plus



M7



M8

Specification Comparison

Product			
General	Product Name	M3 Pro	M5 Plus
	Identification Mode	Password, Card	Finger, Card
	RFID Options	125KHz EM & 13.56MHz MIFARE	125KHz EM(Standard), 13.56MHz MIFARE(Optional)
Capacity	Max. Users	10,000	3,000
	Max. Cards	10,000	3,000
	Max. Logs	100,000	50,000
Function	Group, Time Zone	16 groups, 32 time zones	16 groups, 32 time zones
	Web Server	√	√
	Voice Prompt	Buzzer	Buzzer
	Multiple Language	-	-
Hardware	Software	CrossChex Standard	CrossChex Standard
	CPU	Linux 1.0 GHz	Linux 1.0 GHz
	Sensor	-	AFOS Touch Active Sensor
	Scanning Area	-	22mmx18mm (0.87x0.71")
	Display	-	-
	Keypad	Touch Active	-
	Dimensions(W x H x D)	124x47x22mm (4.88x1.85x0.87")	50x124x34.5mm (1.97x4.88x1.36")
	Working Temperature	-30°C~60°C (-22°F~140°F)	-30°C~60°C (-22°F~140°F)
	Humidity	20% to 90%	20% to 90%
	PoE	-	-
	Power Input	DC12V	DC12V
	Protection Class	IP65, IK10	IP65, IK10
I/O	TCP/IP	√	√
	RS485	√	√
	Wi-Fi	√	√
	Bluetooth	√	√
	Relay	√	√
	I/O	Door Contact/ Exit Button	Door Contact/ Exit Button
	Tamper Alarm	√	√
	Anti-pass Back	-	√
	Wiegand	Output	Output

**M7**

Finger, Password, Card

125KHz EM & 13.56MHz MIFARE

3,000

3,000

50,000

16 groups, 32 time zones

-

Buzzer

✓

CrossChex Standard

32-bit Processor

AFOS Touch Active Sensor

22mmx18mm (0.87x0.71")

1.28 OLED Screen

Physical Button

58x166x32mm (2.28x6.54x1.26")

-30°C~-60°C (-22°F~140°F)

20% to 90%

IEEE802.3af/at

DC12V

IP65, IK10

✓

✓

-

-

✓

Door Contact/ Exit Button

✓

-

Output



*

**M8**

Face, Password, Card

125KHz EM(Standard), 13.56MHz MIFARE(Optional)

1,000

1,000

100,000

16 groups, 32 time zones

✓

Voice

✓

CrossChex Standard & CrossChex Cloud

Linux 1.0 GHz

Camera

-

4.3" TFT

Touch Active

124x47x22mm (4.88x1.85x0.87")

-10°C~60°C (14°F~140°F)

20% to 90%

IEEE802.3af/at

DC12V

IP65

✓

✓

✓

Optional

✓

Door Contact/ Exit Button

✓

-

Output

*M8 Intercom version is scheduled to be released in the second half of 2022.

Access Control

C2 Series

Versatile Standalone Access & Time Attendance Control Terminal



Multi-Smartcard Reader

Support 125kHz or 13.56MHz RFID including MIFARE, MIFARE Plus, DESFire, FeliCa, LEGIC, EM, and NFC.



Communicates with Smartphones

With Anviz Control Protocol (ACP). Any data exchange between the terminal and the smartphone is heavily encrypted and eliminating the possibility of data hacking.



Mullion-type Design

C2 Series mounts easily with a small access control terminal that can easily be installed on a door frame.



IP65 Dust & Water Proof

C2 Series is designed to be used indoor and outdoor applications coupled with IP65 ingress protection.




PoE Easy Installation

Support power sourcing over Ethernet cable compliance to IEEE802.3af standard, to provide users with lower installation cost, simpler cabling, and lower maintenance cost.




Development Tools


We provide value-added integrations with Anviz new V2.0 SDK and API and offer support services to technology partners with full TCP/IP communication mode and the new C language is compiled into a dynamic library, which is compatible with various operations.

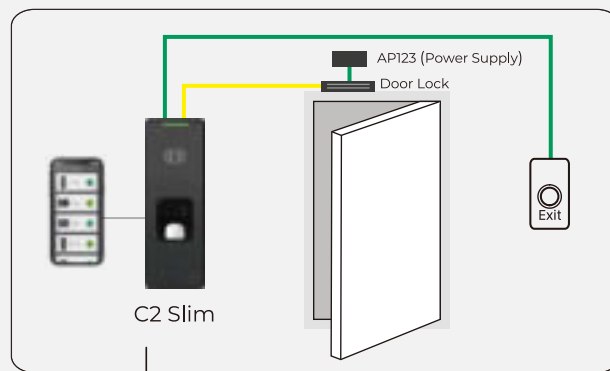

TCP/IP

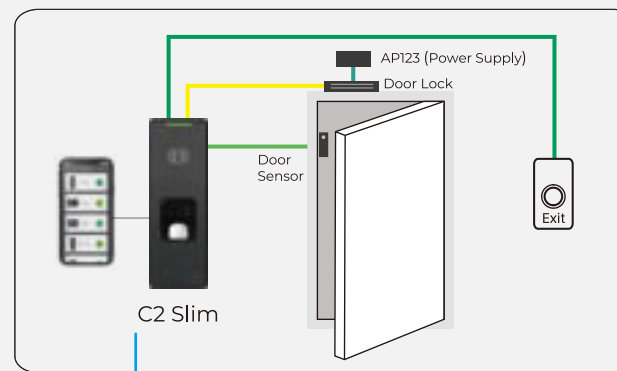

PoE

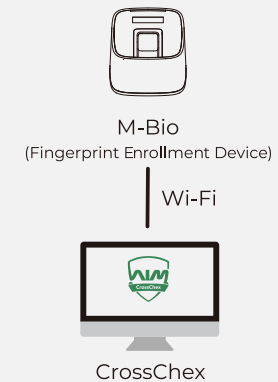

— Output — Input — Relay



C2 SR



C2 KA



C2 Slim



C2 Pro

TA

Specification Comparison

Product			
General	Product Name	C2 SR	C2 KA
	Identification Mode	Card	Card, Password
	RFID Options	125kHz EM & 13.56MHz MIFARE	125kHz EM & 13.56MHz MIFARE
Capacity	Max. Users	-	10,000
	Max. Cards	-	10,000
	Max. Logs	-	100,000
Function	Time Attendance Mode	-	-
	Group, Time Zone	-	16 groups, 32 time zones
	Work Code	-	-
	Short Message	-	-
	WebServer	-	√
	Record Auto Inquiry	-	-
	Daylight Saving	-	√
	Voice Prompt	-	Voice
	Multiple Language	-	-
	Software	-	CrossChex Standard
Hardware	CPU	32-bit Processor	Linux 1.0 GHz
	Sensor	-	-
	Scanning Area	-	-
	Display	-	-
	Keypad	-	Physical Button
	Dimensions(W x H x D)	50x159x25mm (1.97x6.26x0.98")	50x159x25mm (1.97x6.26x0.98")
	Working Temperature	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)
	Humidity	20% to 80%	20% to 90%
	PoE	-	IEEE802.3af/at
	Power Input	DC12V	DC12V
	IP Grade	IP65	IP65
I/O	TCP/IP	-	√
	RS232	-	-
	RS485	√	√
	USB Host	-	-
	Wi-Fi	-	√
	Bluetooth	-	√
	Relay	-	√
	I/O	-	Door Contact/ Exit Button
	Tamper Alarm	-	√
	Wiegand	Output	IN & OUT



C2 Slim

Finger, Card

125kHz EM & 13.56MHz MIFARE Card
HID iCalss(Optional)

3,000

3,000

50,000

-

16 groups, 32 time zones

-

-

✓

-

✓

Voice

-

CrossChex Standard

Linux 1.0 GHz

AFOS Touch Active Sensor

22mmx18mm (0.87x0.71")

-

-

50x159x25mm (1.97x6.26x0.98")

-10°C~60°C (14°F~140°F)

20% to 90%

IEEE802.3af/at

DC12V

IP65

✓

-

✓

-

✓

✓

✓

Door Contact/ Exit Button

✓

IN & OUT



C2 Pro

Finger, Password, Card

125kHz EM & 13.56MHz MIFARE Card
HID iCalss(Optional)

10,000

10,000

100,000

8

16 groups, 32 time zones

8 digits

50

✓

✓

✓

Voice

✓

CrossChex Standard & CrossChex Cloud

Dual Core 1.0 GHz

AFOS Touch Active Sensor

22mmx18mm (0.87x0.71")

3.5" TFT

Physical Button

140x190x32mm (5.51x7.48x1.26")

-10°C~60°C (14°F~140°F)

0% to 90%

IEEE802.3af/at

DC12V

-

✓

✓

✓

✓

✓

-

✓

-

-

Output

Time and Attendance


Anviz time and attendance solution provide a simple way to track and manage employee attendance, dedicated to saving your business money through employee time management, reducing administrative costs of time and attendance data collection and processing, thereby increasing overall productivity and profitability.


 Biometric-based time and attendance management (Facial, fingerprint scanner, RFID and PIN) offer versatile punching options, provides accurate employee data that eliminates buddy punching and time theft, while also saving you money.

 Flexible, scalable, and customizable schedule management to suit any business, no matter what size.

 High-impact and personalized reporting which makes you feel intuitive with daily processes.

 Time and attendance cloud support provide hassle-free workforce management, easily track and manage employee attendance from anywhere, anytime.

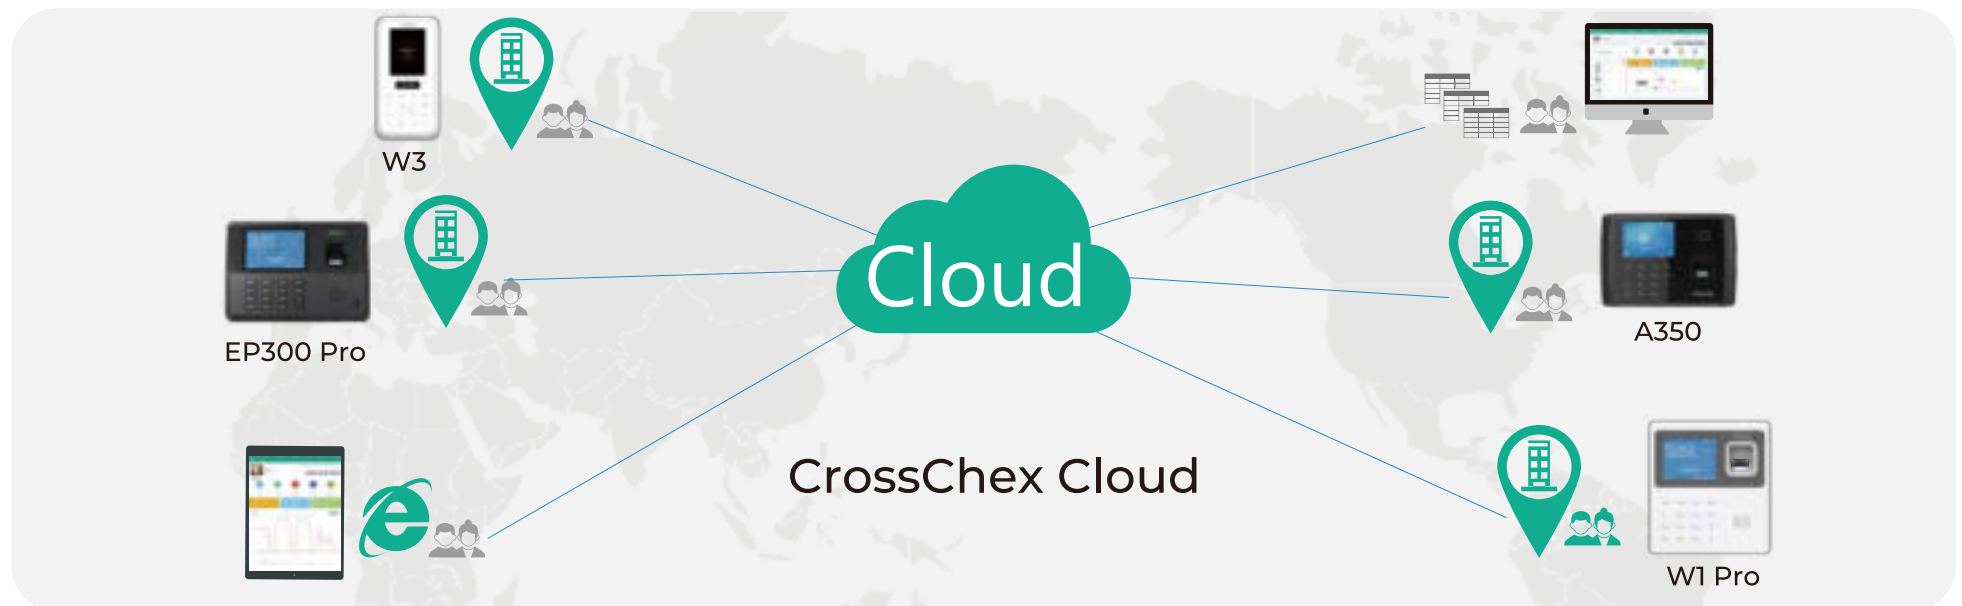

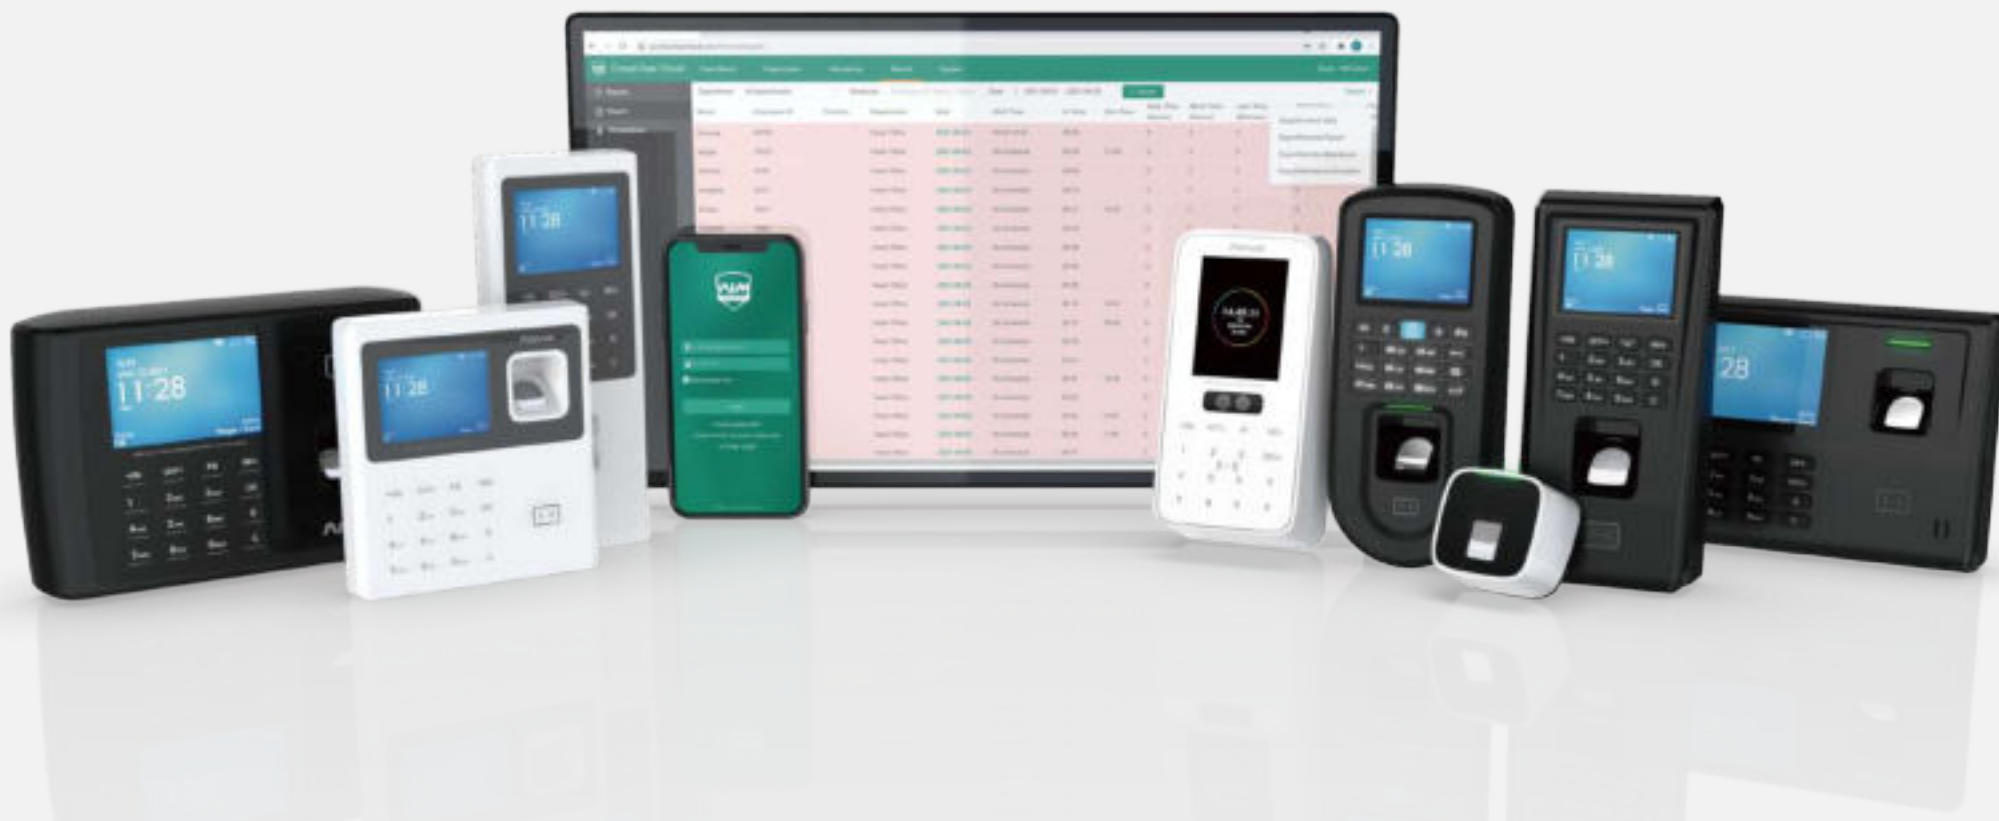

A350



W1 Pro



W2 Pro
AC



W3
AC



VF30 Pro
AC



M-Bio



EP30
AC




EP300 Pro

Specification Comparison

Product				
Product Name		W1 Pro	W2 Pro	W3
General	Identification Mode	Finger, Password, Card	Finger, Password, Card	Face, Password, Card
	RFID Options	125kHz EM(Standard), 13.56MHz MIFARE(Optional)	125kHz EM(Standard), 13.56MHz MIFARE(Optional)	125kHz EM(Standard)
Capacity	Max. Users	3,000	3,000	200
	Max. Cards	3,000	3,000	200
	Max. Logs	100,000	100,000	50,000
Function	Time Attendance Mode	8	8	8
	Group, Time Zone	-	16 groups, 32 time zones	-
	Work Code	6 digits	6 digits	-
	WebServer	√	√	√
	Record Auto Inquiry	√	√	√
	Daylight Saving	√	√	√
	Voice Prompt	Voice	Voice	Voice
	Multiple Language	√	√	√
	Software	CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud
Hardware	Sensor	AFOS Touch Active Sensor	AFOS Touch Active Sensor	Dual Cameras
	Display	2.8' TFT LCD	2.8' TFT LCD	2.8' TFT LCD
	Keypad	Touch Active	Touch Active	Touch Active
	Dimensions(W x H x D)	130x140x30mm (5.11x5.51x1.18")	204x80x30mm (8.03x3.15x1.18")	105x72x46mm (4.13x2.83x1.81")
	Working Temperature	-10°C~-60°C (14°F~140°F)	-10°C~-60°C (14°F~140°F)	-10°C~-60°C (14°F~140°F)
	Humidity	20% to 90%	20% to 90%	20% to 90%
	Power Input	DC5V	DC12V	DC12V
	Battery	Optional	Optional	-
I/O	TCP/IP	√	√	√
	RS485	-	√	-
	USB Host	√	√	√
	Wi-Fi	Optional	Optional	Optional
	Bluetooth	-	-	-
	4G	-	-	-
	Relay	-	√	√
	I/O	-	Door Contact/ Exit Button /Bell	Door Contact/ Exit Button /Bell
	Tamper Alarm	-	√	-
	Anti-pass back	-	√	-
	Wiegand	-	IN & OUT	-



A350	EP300 Pro	EP30	VF30 Pro	M-Bio
Finger, Password, Card	Finger, Password, Card	Finger, Password, Card	Finger, Password, Card	Finger, Card
125kHz EM(Standard), 13.56MHz MIFARE(Optional)	125kHz EM(Optional)	125kHz EM(Optional), 13.56MHz MIFARE(Optional)	125kHz EM(Standard), 13.56MHz MIFARE(Optional)	125kHz EM & 13.56MHz MIFARE
3,000	3,000	3,000	3,000	3,000
3,000	3,000	3,000	3,000	3,000
100,000	100,000	100,000	100,000	100,000
8	8	8	8	-
-	-	16 groups, 32 time zones	16 groups, 32 time zones	-
6 digits	6 digits	6 digits	6 digits	-
✓	✓	✓	✓	✓
✓	✓	✓	✓	-
✓	✓	✓	✓	-
Voice	Voice	Voice	Voice	Voice
✓	✓	✓	✓	-
CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud	CrossChex Standard & CrossChex Cloud
AFOS Touch Active Sensor	AFOS Touch Active Sensor	AFOS Touch Active Sensor	AFOS Touch Active Sensor	AFOS Touch Active Sensor
2.8' TFT LCD	3.5' TFT LCD	3.5' TFT LCD	2.4' TFT LCD	1.18' OLED
Touch Active	Physical Button	Physical Button	Physical Button	-
204x139x38mm (5.11x5.51x1.18")	185x130x35mm (7.28x5.12x1.38")	165x76x35mm (6.50x2.99x1.38")	80x180x40mm (3.15x7.09x1.57")	60x60x50mm (2.36x2.36x1.97")
-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)
10% to 90%	20% to 90%	20% to 90%	20% to 90%	20% to 90%
DC5V	DC5V	DC12V	DC12V & PoE IEEE802.3af/at	USB
Optional	Optional	-	-	✓
✓	✓	✓	✓	-
-	-	✓	✓	-
✓	✓	-	-	-
Optional	Optional	Optional	Optional	Standard
Optional	Optional	-	-	Standard
Optional	-	-	-	-
✓	-	✓	✓	-
-	-	Door Contact/ Exit Button	Door Contact/ Exit Button /Bell	-
-	-	✓	✓	-
-	-	✓	✓	-
-	-	Output	IN & OUT	-

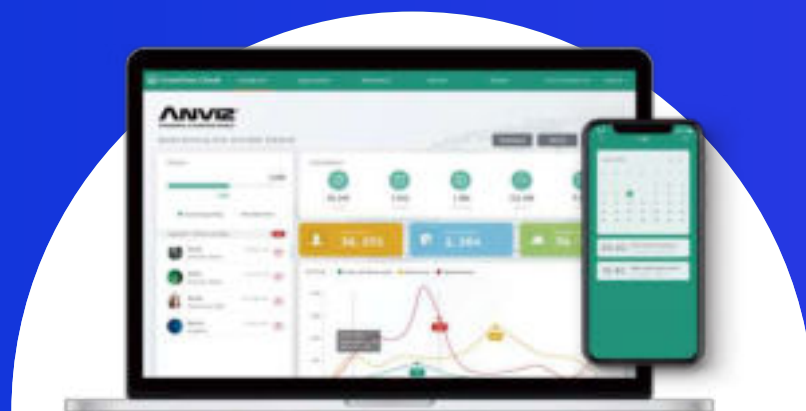

Distributed by:



Anviz Global Inc.

32920 Alvarado-Niles Rd Ste 220, Union City, CA 94587 | Toll-free: 1-855-268-4948 | sales@anviz.com | www.anviz.com

©2022 Anviz Global Inc. All right reserved. Product specifications and availability are subject to change without notice. For the most up-to-date information, please visit www.anviz.com