



# JustView

## Hidden HD Micro IR Dome Network Camera

JustView series is a flat profile micro dome cameras that support audio and video synchronous recording. The optional PoE or WIFI eliminates the need for separate power cables which makes the installation easier. JustView series is hardly noticeable for locations that require a small camera appearance with discrete monitoring and true Day/Night functionality.




### Key Features


- ▶ High Definition up to 2M
- ▶ True Day/Night Functionality with Removeable IR Cut Filter
- ▶ Built-in Hi-sensitivity Mic

- ▶ Smart Edge Storage
- ▶ Privacy Mask
- ▶ Motion Detection
- ▶ Region of Interest

- ▶ **IR Anti-reflection Shield**  
High Polymer IR anti-reflection shield can effectively increase the transmittance of infrared light

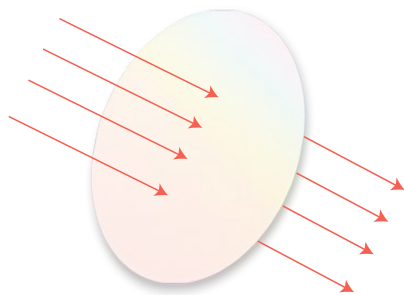


- ▶ **Built-in Hi-sensitivity Mic**  
The JustView has a built-in microphone, eliminating the need to install separate audio connectors on site.



## Technical Specifications

Type	JU1402-IE	JU2502-IRE	JU2702-IRE
Resolution	1 Megapixel	2 Megapixel	4 Megapixel
Image Sensor	1/3" CMOS	1/3" CMOS	1/3" CMOS
Shutter Time	1/3s-1/100000s		
Frame rate	50HZ: 25fps(1280×720) 60HZ: 30fps(1280×720)	50HZ: 25fps(1920×1080) 60HZ: 30fps(1920×1080)	50HZ: 20fps(2560×1440) 60HZ: 20fps(2560×1440)
Lens	4mm/F1.6 m12	4mm/F1.6 m12	4mm/F1.6 m12
Horizontal Angle of View	77°	36°	36°
Minimum Illumination	0.1 Lux (Color) / 0.01 Lux(B/W)	0.01 Lux (Color) / 0.001 Lux(B/W)	0.05 Lux (Color) / 0.005 Lux(B/W)
SN Ratio	>52dB		

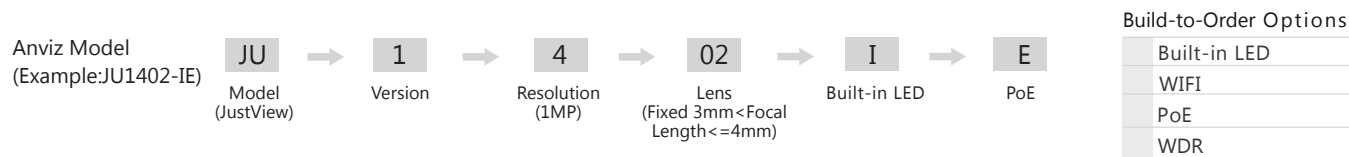

Data Transmission	Transfer Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS	WIFI	Wireless Standard	E802.11b, 802.11g, 802.11n	
	Interface Protocol	ONVIF		Transmission Distance	Outdoor: 100m Indoor: 40m (vary with the environment)	
	Multistream	Support main stream and sub stream		IR Range	20m	
Compression	Video Compression	H.264/MJPEG	IR	IR Control	Intelligently adjust the IR brightness and angle according to scene	
	H.264 Code Type	BaseLine Profile / Main Profile / High Profile		Interface	Ethernet	RJ-45 (10/100/1000Base-T)
	Compression Output	32 Kbps~8Mbps			Audio	1 Mic in
	Bitrate				SD Card	Built-in SD card slot, supports Micro SD / SDHC / SDXC card (up to 64G)
Image	Audio Compression	G.711(64Kbps)	General	Operating Conditions	-10°C to 50°C (14°F to 122°F)	
	Image Settings	Rotate Mode(mirror, flip), Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser		Power Supply	DC12V/PoE(802.3af)(-E model)	
	Day/Night	IR-CUT		Power Consumption	MAX 12W	
	BLC	Support		Weight	155g (0.34pounds)	
	WDR	Support		Dimensions	Φ100*48mm (Φ3.94**1.89")	
	DNR	3D DNR		Safety Certifications	CE, FCC, RoHS	
Smart Function (Optional)	Privacy Mask	Support maximum 4 areas in one picture, various colors available				
	Smart Detection	Motion detection, intrusion detection, cross-border detection, entrance detection, leaving detection, objects left detection, objects taken detection, audio anomaly detection, video mask detection				
	Smart Recording	Support offline continuous transmission to ensure the video is not lost				
	Image Enhancement	Support defog, HSBLC, Anti Shake DSP				
	Smart Encoding	Support low delay rate, ROI				
	Alarm Trigger	Network disconnect, IP address conflict, Storage exception, Illegal access				

